
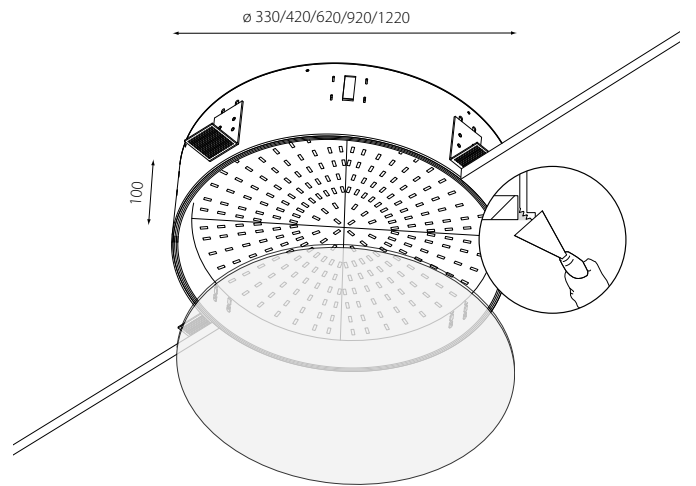
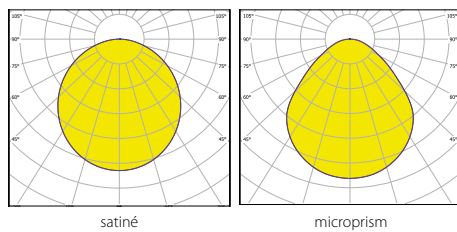


# lili frameless

Einbauleuchte | Recessed luminaire | Luminaire encastré | da incasso

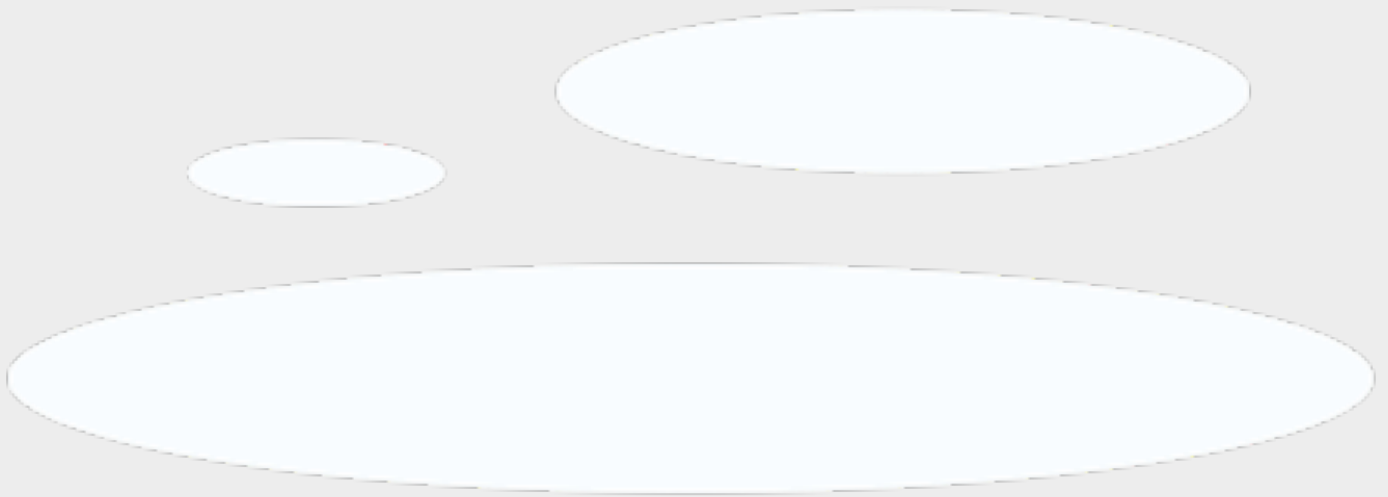

**A++** **A**


230V IP20  $R_a > 80$  up to L80/50.000h MacAdam 3 DALI switchDIM



**LED**  
 3000K, 4000K, dynamic white  
 up to 155 lm/W  
 $R_a > 80$ , MacAdam 3  
 non-dim / DALI  
 IEC 62471: Blue light hazard: RG 0  
 Lifetime up to L80 / 50.000 h

**Optic**  
 direct  
 satiné  
 microprism for reduced brightness (LRA)

**Housing**  
 powder coated  
 RAL 9016



**1 Dimension**

ø 330 mm	<b>033</b>
ø 420 mm	<b>042</b>
ø 620 mm	<b>062</b>
ø 920 mm	<b>092</b>
ø 1220 mm	<b>122</b>

**2 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore**

3000 K	<b>830</b>
4000 K	<b>840</b>
2700 - 6500 K dynamic white	<b>HCL</b>

**3 Output**

low output non-dim	<b>L1</b>
low output DALI	<b>L3</b>
high output DALI	<b>H3</b>
dynamic white	<b>X3</b>

**4 Diffusoren | Diffusers | Diffuseurs | Diffusori**

satiné	<b>S</b>
microprism	<b>M</b>

Beispiel | Example | Exemple | Esempio

ø 420 mm, 4000 K, high output DALI, satiné

**F50F042-9016C1840H3S**

Luminous Flux (lm)

<b>4000 K satiné</b>	high output	low output
ø 330 mm	2036 lm	1216 lm
ø 420 mm	3165 lm	1847 lm
ø 620 mm	6803 lm	3417 lm
ø 920 mm	13708 lm	7016 lm
ø 1220 mm	25724 lm	13353 lm

System Power (W)

	high output	low output	dynamic white
ø 330 mm	18,5 W	11 W	19,5 W
ø 420 mm	27 W	15 W	28 W
ø 620 mm	51 W	25 W	53 W
ø 920 mm	96 W	47 W	99 W
ø 1220 mm	172 W	86 W	190 W

Weight (kg)

ø 330 mm	2,4 kg
ø 420 mm	3,7 kg
ø 620 mm	7,4 kg
ø 920 mm	15,9 kg
ø 1220 mm	25,9 kg

**COMPARE LIGHT COLOUR**

Luminous Flux (lm)	<b>3000 K</b>		<b>4000 K</b>		<b>dynamic white</b>
<b>satiné</b>	high output	low output	high output	low output	2700-6500 K
ø 420 mm	3014 lm	1819 lm	3165 lm	1847 lm	2911 lm

**COMPARE COVER**

Luminous Flux (lm)	<b>satiné</b>		<b>microprism</b>	
<b>4000 K</b>	high output	low output	high output	low output
ø 420 mm	3165 lm	1847 lm	2663 lm	1583 lm



**Cut out ✂**

DIMENSION	ø DIAMETER	↑ DEPTH
ø 330 mm	ø 337 mm	115 mm
ø 420 mm	ø 427 mm	115 mm
ø 620 mm	ø 627 mm	115 mm
ø 920 mm	ø 927 mm	115 mm
ø 1220 mm	ø 1227 mm	115 mm

Montagehilfe | Installation helper | aide à installation | Set da montaggio

- F50F-ROH-033**
- F50F-ROH-042**
- F50F-ROH-062**
- F50F-ROH-092**
- F50F-ROH-122**

